




### Product Size

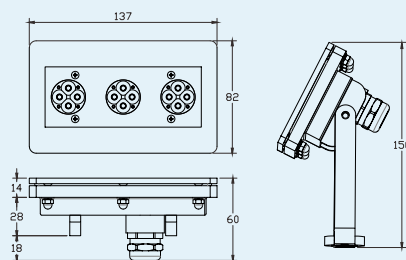

### Specification

<b>Model No.:</b>	RS-UW36W316X-L-S(88454)
<b>Front cover &amp; Housing:</b>	Stainless steel 316L
<b>Dimensions:</b>	L137*W82*H150mm(Max.)
<b>Tempered Glass:</b>	8mm thickness
<b>LED chip:</b>	Cree
<b>LED Q'ty:</b>	9pcs 3W LED / 12pcs 3W LED
<b>Cable gland:</b>	Stainless steel 316L PG13.5
<b>Driver:</b>	Constant current driver
<b>Lens:</b>	Clear, Bead
<b>Beam Angle Options:</b>	10° 30° 60°
<b>Power Cable:</b>	AWG 5/18 or AWG 3/18 SOW rubber cable
<b>Protection Class:</b>	IP68
<b>Environment:</b>	Dry / Submerged
<b>Mounting Hardware:</b>	Surface Mounted System
<b>Net Weight:</b>	1.8kgs with 1.5m cable
<b>Lifetime:</b>	>50000H

### Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88454.093.01	2700-3000K	9*3	V+/V-	DC12-24	2250-1500	27	1260
88454.093.02	4000-4500K	9*3	V+/V-	DC12-24	2250-1500	27	1332
88454.093.03	5000-5500K	9*3	V+/V-	DC12-24	2250-1500	27	1395
88454.093.04	6000-6500K	9*3	V+/V-	DC12-24	2250-1500	27	1395
88454.093.05	Red	9*3	V+/V-	DC12-24	1500-1000	18	315
88454.093.06	Green	9*3	V+/V-	DC12-24	2250-1500	27	810
88454.093.07	Blue	9*3	V+/V-	DC12-24	2250-1500	27	360
88454.093.08	Yellow	9*3	V+/V-	DC12-24	2250-1500	27	855
88454.093.09	RGB-DMX512 (3 channel)	9*3	V+ /V- /D+ /D- /GND	DC24	R: 250 B: 375 G: 375	R: 6 G: 9 B: 9	R: 105 G: 270 B: 120
88454.123.12	RGBW-DMX512 (4 channel)	12*3	V+ /V- /D+ /D- /GND	DC24	R: 500 G: 500 B: 500 W: 500	R: 12 G: 12 B: 12 W: 12	R: 300 G: 720 B: 360 W: 1080

